


B-J-FLEX

3 Rue E. Dewoitine
31700 - Cornebarrieu
Tél:05.61.85.34.34 - Fax:05.61.85.16.11

913 16/19/25

Rev.	Date
04	31.10.02
01	01.11.96
02	20.08.98
03	01.09.00

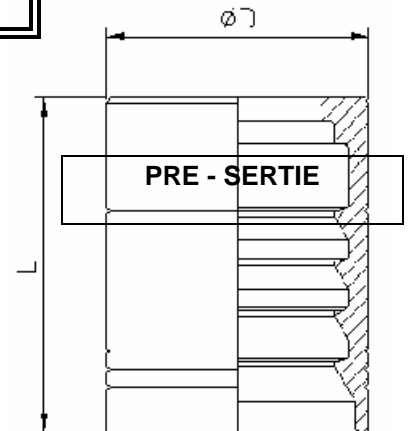

Diamètre tuyau	type jupe Ø X long	paramètres sertissage	R9R		4 SH		R 13		Ø mors conseillé
DN 16 5/8" MOD 10	(913 16) Ø 32 X 44	Lg dénudage <i>Garde</i> Ø serti	33 13 29.0						
DN 19 3/4" MOD 12	(913 19) Ø 38 X 49	Lg dénudage <i>Garde</i> Ø serti	39 14 34.		39 14 33.7		39 14 34.4		32
DN 25 1" MOD 16	(913 25) Ø 46 X 58	Lg dénudage <i>Garde</i> Ø serti	46 16 42.8		46 16 42.5		46 16 42.9		40

AVENANT AU TABLEAU " JS 4R - JS 10 13 "
Jupes marquées 913 16 / 913 19/ 913 25...

ATTENTION : VALEURS DONNEES A TITRE INDICATIF. CONTROLE A LA PIGE DE LA DEFORMATION DU NIPPLE.

This document was created with Win2PDF available at <http://www.daneprairie.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.